

JMG Cranes S.p.A.  
Sales & Service Office  
Via Bergamo, 142  
26100 Cremona - Italy  
t +39 0372 1786738  
Production Plant  
Via Sito Nuovo 14  
29010 Sarmato (PC) - Italy  
t +39 0523 8486  
e [info@jmgcranes.com](mailto:info@jmgcranes.com)



[www.jmgcranes.com](http://www.jmgcranes.com)



*Electric  
Pick & Carry  
Cranes*



**MC 250.09FL (inch)**  
**Max Capacity hydraulic forks**  
**55,100 lbs@2,95ft**

**JMG<sup>®</sup>**  
movetosolution

# MC 250.09FL

REAR GROUP WITH TWO INDEPENDENT ROTATION GROUPS  
FRONT WHEELS DRIVE WITH COUNTERROTATION  
MAST FREE LIFT  
REMOVABLE COUNTERWEIGHTS  
REMOVABLE GROUP




## Optionals:

- HYDRAULIC CRANE BOOM WITH ELECTRONIC SAFE LOAD INDICATOR AND TILTING MOMENT LIMITER
- NON MARKING TIRES
- RADIO REMOTE CONTROL
- ATEX CONVERSIONS
- CUSTOMIZED PAINTING

## Load charts

FORKS CAPACITY - ALL COUNTERWEIGHTS - OPEN GROUP

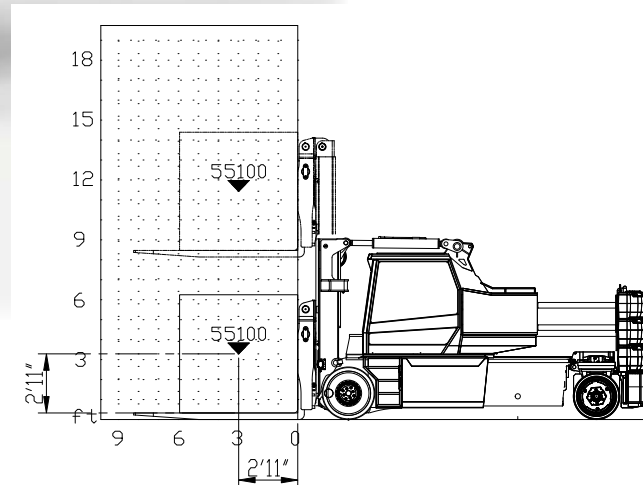


## Technical features


|                         |                          |
|-------------------------|--------------------------|
| Forks with open group   | 55,100 lbs@2,95ft        |
| Forks with closed group | 36,376 lbs@2,95ft        |
| Dimensions              | 162,2x70,86x108,2 Inches |

|  |                                                                                                                                                                          |  |                                                                                                                                        |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------|
|  | Front-wheels drive.<br>N°2 electric motors AC 12 kW 96V                                                                                                                  |  | Hydraulically foot controlled service brake on all wheels, hydraulically automatic or button controlled parking brake on front wheels. |
|  | Total with forks lb 55100<br>Total with crane boom lb 55100<br>Weight support and fork lenght lb 6600<br>Crane boom weight lb 6600<br>Removable ballasts weight lb 13220 |  | Fabricated from preformed and welded quality steel plate                                                                               |
|  | 96 V - 1050 Ah                                                                                                                                                           |  | Mast angle inclination +12°/-7°                                                                                                        |
|  | 800x410 in polyurethane cushion rear wheels: nr 4 in cushion 28x10x22                                                                                                    |  | N°1 electric motor AC 35kW 96V                                                                                                         |
|  | Rear                                                                                                                                                                     |  |                                                                                                                                        |

BOOM CAPACITY ON THE MAST - ALL COUNTERWEIGHTS - CLOSED GROUP

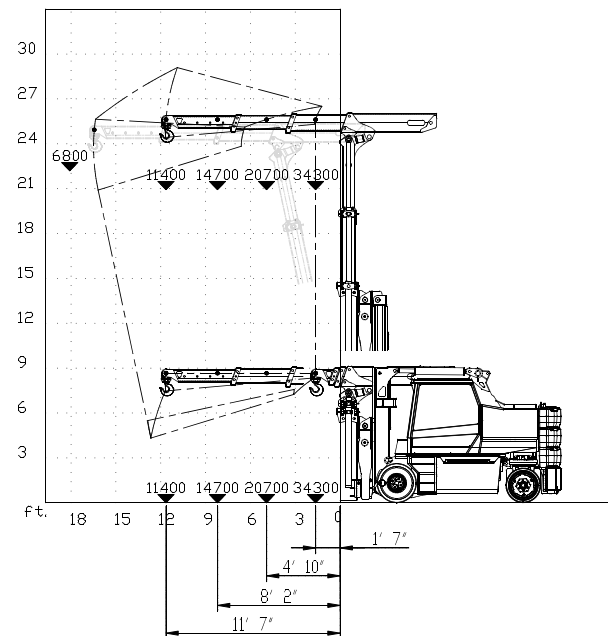

BOOM CAPACITY ON THE MAST - ALL COUNTERWEIGHTS - OPEN GROUP

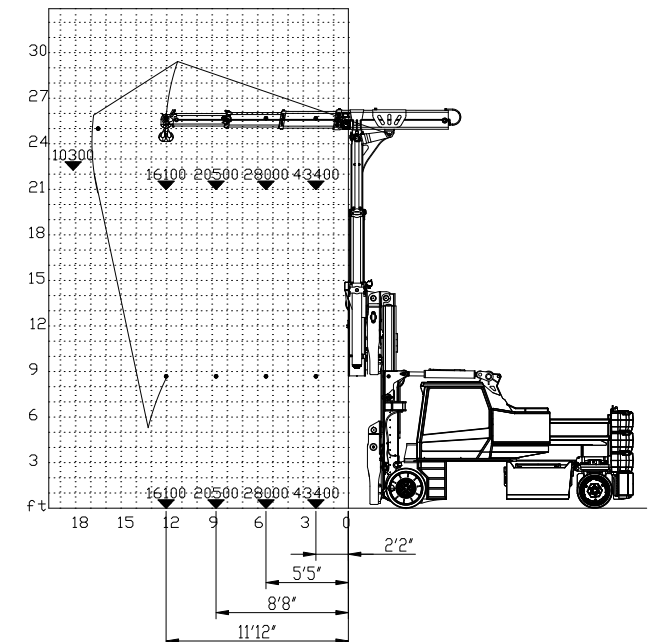

EU Standards CE



Dimensions

|  |                                                                                 |
|--|---------------------------------------------------------------------------------|
|  | EN 13000:2014 ONLY HYDRAULIC BOOM.<br>ASME B30.5-2014                           |
|  | UNI ISO 3691-1983 IT<br>UNI ISO 22915-2-2020 EN<br>and subsequent modifications |

